Series GMK
Motor type 404 757

Design Data	
Commutation	Brushed
Direction of rotation	Bi-directional
Bearing type	A:Ball - B:Sleeve

Performance data		
Rated voltage [V]	U_N	24
Nominal torque [Nm]	M_N	0.30
No-load speed [min^{-1}]	n_0	2,200.0
Nominal power [W]	P_N	53.2
Nominal current [A]	I_N	3.0
Nominal force [kN]	F_N	0.00
Duty cycle		s1

Sensor data	
Pulses	0
Output channels	0

Other data	
Gear ratio	
Gear wheel material	
Suppression components	5µH, 10nF
Enclosure class	IP 30
Weight [kg]	0.890

Remarks:

0272 A

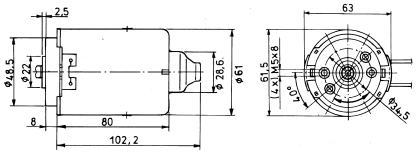

Motor picture

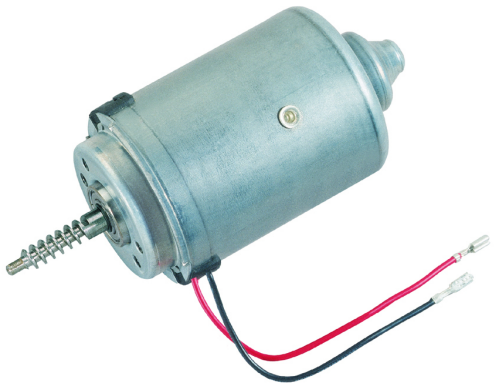

Characteristic curves

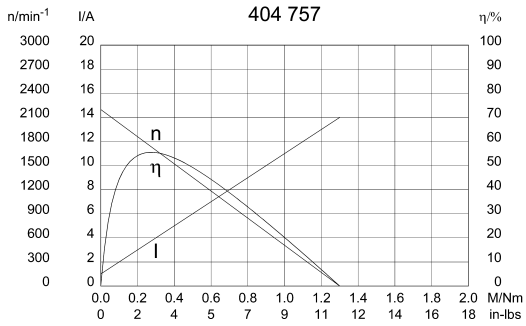

Output shaft drawing (W), Wiring diagrams (S) and Connector layout (K)

W 281

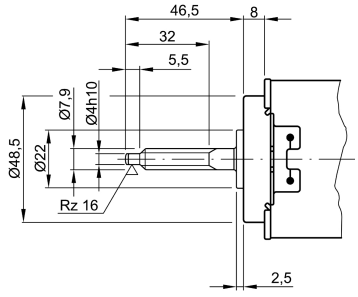

no of starts 2 , **lead angle** 19°48'54", **pressure angle** 15°, **pitch** 3,141 mm (0,124"), **module** 1

S 30



K 190



I Receptacles for tabs 2,8 x 0,8 DIN 46 247
II black
III red