


# Series GMAG


## Motor type 404 326

### Design Data

Commutation	Brushed
Direction of rotation	Bi-directional
Bearing type	

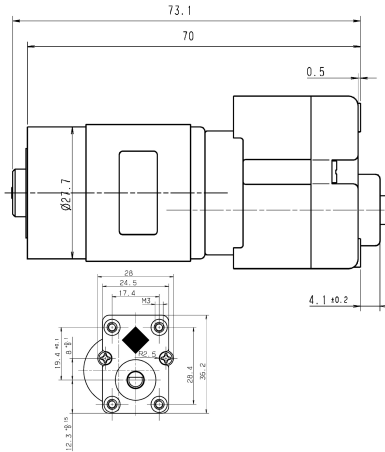

### Motor picture

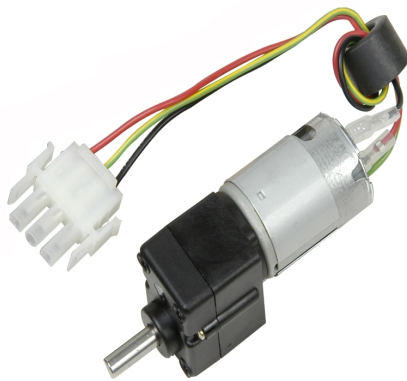

### Performance data

Rated voltage [V]	$U_N$	24
Nominal torque [Nm]	$M_N$	0.20
No-load speed [ $\text{min}^{-1}$ ]	$n_0$	135.0
Nominal power [W]	$P_N$	2.26
Nominal current [A]	$I_N$	0.3
Nominal force [kN]	$F_N$	0.00
Duty cycle		s3

### Sensor data


Pulses	0
Output channels	0

### Other data




Gear ratio	43/1
Gear wheel material	
Suppression components	
Enclosure class	IP40
Weight [kg]	0.180

Remarks:

### Characteristic curves

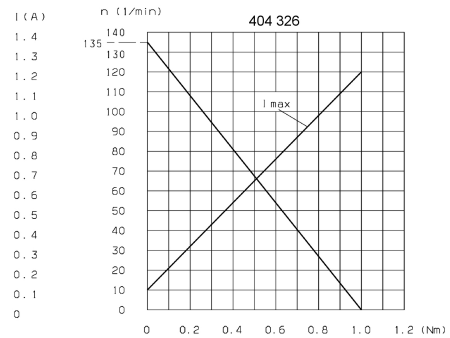

### Output shaft drawing (W), Wiring diagrams (S) and Connector layout (K)

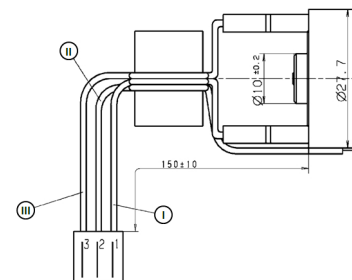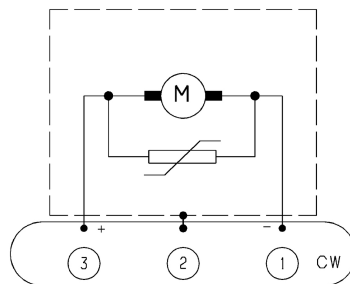

Housing: AMP-Nr.: 1-480 700-0  
 Pins: AMP-Nr.: 350 570-1  
 I: black  
 II: yellow/green  
 III: red